

## Electric DC Voltage Heater

## PTC heating element with MCC electronic temperature stabilization and safety control

All electric PTC heater with MCC electronic stabilization control of temperature and safety sintegrated fan speed and temperature control single clean and reusable filter with easy to access panel inlets for

recirculation air and fresh air applications 4 outlets for good airflow directional control compact size for easy application EMI compliant.




## **Features**



- PTC Heating E nt
- Long Life brushless motor
- High efficiency and Quie ration
- Industry leading power management
- Compact design and Lovenght
- Four direction airflow louvers

- MCC propit
   v electronic controller
- Easy access and reusable filter
- Low maintenanc
- Flexible mounting for bottom or side
- Integrated speed and temperature control
- CAN (J1939) capable 🔾



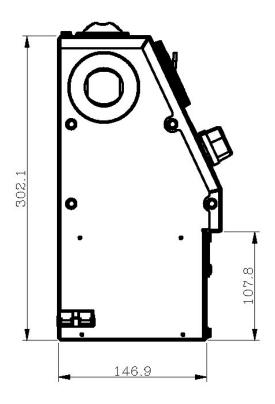

## **Technical Data**

Airflow ~175 CFM

Heating Capacity 5500 Btu/hr (1600 Watts)

Noise (SPL) 60 dba at maximum speed setting

Maximum discharge temperature 60 C

Maximum surface temperature 60 C

