



Husky 353-3 & 353-4

High capacity economical roof mount bus HVAC unit

The Husky 353 is an economical rooftop air-conditioning system that serves specific market needs. When combined with MCC's recommended compressors, the Husky 353 will provide optimum cooling capacity for the best price. Two model sizes to accommodate extreme cooling requirements

and tropical conditions. Multiple motor options also allows for greater choice to suit the application, from standard brush type motors to brushless motors or a mix of both. With MCC's electronics we provide easy operation.




Features

- Motor options brushed and brushless
- Micro channel MCHX condenser coils
- R134a refrigerant with optimal system design
- Centre return air access
- Optimal heating and cooling capacity
- EcoTemp Lite controller
- Compressor options
- Two models for high ambient locations

Benefits

- Reduced noise, less power, greater reliability
- Improved performance and lower weight
- Less refrigerant, lower cost
- Ease of access for maintenance and servicing
- Suitable for all weather conditions
- Simplified for easy operation
- Customer choice of compressor
- Fleet compatible for standardization across models

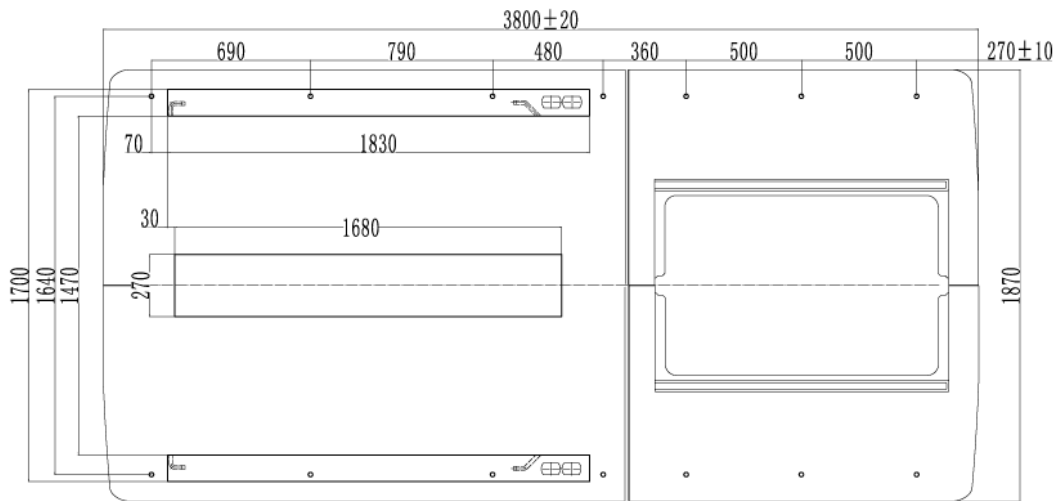

Technical Data

	Husky 353/3	Husky 353/4
Cooling capacity @ max ^[1]	150000 Btu/hr (44kW)	171000 Btu/hr (50kW)
Cooling capacity @ ARI ^[2]	130000 Btu/hr (38 kW)	151000 Btu/hr (44kW)
Heating @ 7 gpm (100F Δ T)	130000 Btu/hr (38 kW)	82000 Btu/hr (24kW)
Length	150" (3,800 mm)	
Width	74" (1,870 mm)	
Height	8.25" (210 mm)	
Weight	419 lbs (190 kg)	441 lbs (200kg)
Refrigerant	R134a	
Airflow (Max)	3,885 CFM (6,600 m ³ /h) free-blow	5,179 CFM (8,800M ³ /h) free-blow
Current Draw (Max)	95 A at 28 V	115 A at 28 V

[1] Max conditions 95°F (35°C)/104°F (40°C)/50% RH
 [2] ARI: 95°F (35°C) / 80°F (27°C) / 50% RH

