



## Evaporator **EM-3**

MCC EM-3 rear ceiling mount air conditioning evaporator has been engineered for maximum serviceability and ease of installation in light and medium duty buses. Because the drain pan is part of the basic system, the EM-3 can be completely installed, charged and tested before the cover is put

in place, greatly reducing installation time. Simple cover removal provides ready access to all serviceable components. The EM-3 is available for non-ducted free blow applications in 30' – 35' (914 – 1067 cm) length passenger areas.




### Features

- New, efficient, transverse blower technology reduces AMP draw and provides increased uniformly distributed air flow
- Higher capacity unit in a smaller package (height reduced to over 20% less than existing models, thereby significantly increasing head clearance)
- Heavy-duty steel frame is reinforced for added strength
- High volume air flow, widely dispersed through bi-directional louvers for total passenger comfort
- Return air filter can be removed and cleaned without removing the unit's cover
- State-of-the-art-enhanced coils for maximum cooling capacity and increased efficiency
- Configurations of three or more variable speed blower are available for full airflow adjustment to optimize system to individual cooling preferences
- Reduced service time and over all life cycle cost with single, easily accessible motor, bottom mounted air filter, 10% fewer parts and fasteners than previous models
- Can only be rear center ceiling mounted in all makes and models of buses

# Evaporator EM-3

MCC Evaporators

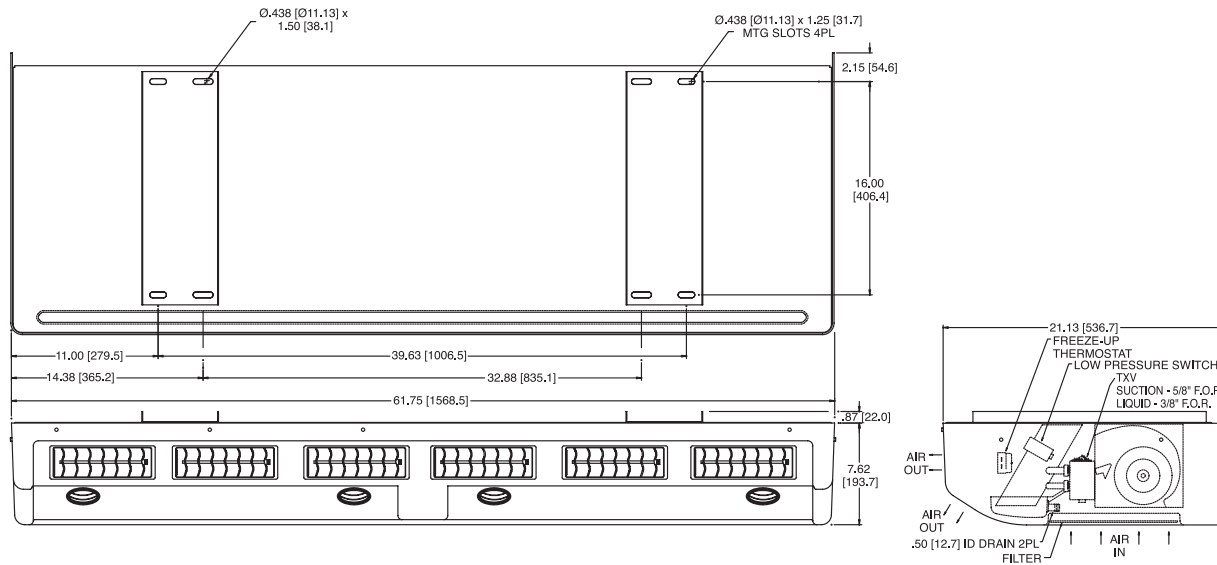

## Technical Data

Cooling capacity	90000 Btu/hr (26 kW) IMACA <sup>[1]</sup>	47000 Btu/hr (14 kW) ARI <sup>[2]</sup>
Air flow	2400 CFM (679.6 m <sup>3</sup> /hr)	
Refrigerant	R134a	
Length	61.75" (1568 mm)	
Width	21.13" (537 mm)	
Height	8.49" (215.6 mm)	
Weight	95 lbs (43 kg)	
Condensed drain connection	½" (12.7 mm) O.D	
Max amperage requirement	46 A @ 13.5 V dc (High Speed)	
Voltage	12 or 24 VDC	
Cover color	Snow White or Dove Gray	

[1] IMACA conditions: 100°F (38°C) / 90°F (32°C) / 50% RH

[2] ARI conditions: 95°F (35°C) / 80°F (27°C) / 50% RH

