



Evaporator **EM-7**

MCC EM-7 ceiling mount air conditioning evaporator has been engineered for maximum serviceability and ease of installation in commercial and school buses and vans. Because the drain pan is part of the basic system, the EM-7 can be completely installed, charged and tested before the

cover is put in place, greatly reducing installation time. Simple cover removal provides ready access to all serviceable components.

This evaporator is available for non-ducted free blow applications in 15" – 20" (381 – 508 mm) passenger areas.




Features

- New, efficient, transverse blower technology reduces AMP draw and provides increased uniformly distributed air flow
- Higher capacity unit in a smaller package (height reduced to over 20% less than existing models, thereby significantly increasing head clearance)
- Heavy-duty steel frame is reinforced for added strength
- High volume air flow, widely dispersed through bi-directional louvers for total passenger comfort
- State-of-the-art enhanced coils for maximum cooling capacity and increased efficiency
- Configurations of three or more variable speed blower are available for full air flow adjustment to optimize system to individual cooling preferences
- Reduced service time and overall life-cycle cost with single, easily accessible motor, bottom mounted air filter, 10% fewer parts and fasteners than previous models
- Return air filter can be removed and cleaned without removing the unit cover
- Can be front/rear center or front/rear side mounted in all makes /models of buses

Evaporator EM-7

MCC Evaporators

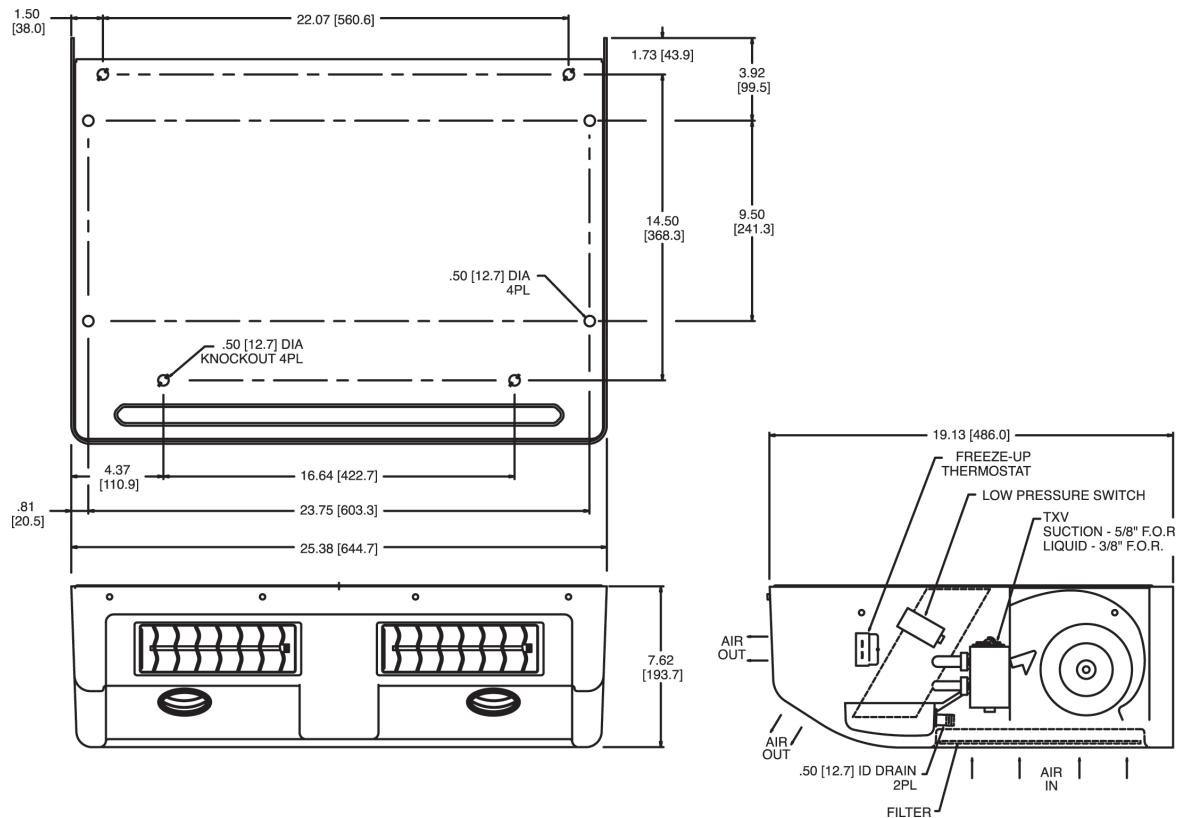

Technical Data

Cooling capacity	35000 Btu/hr (10.25 kW) IMACA ^[1]	13700 Btu/hr (4 kW) ARI ^[2]
Air flow	800 CFM (1359 m ³ /hr)	
Refrigerant	R134a	
Length	25.38" (645 mm)	
Width	19" (486 mm)	
Height	7.62" (193.5 mm)	
Weight	41 lbs (19 kg)	
Condensate drain connection	½" (12.7 mm) O.D	
Max amperage requirement	15.9 A @ 13.5 V dc (High Speed)	
Voltage	12 or 24 VDC	
Cover color	Snow White or Dove Gray	

[1] IMACA conditions: 100°F (38°C) / 90°F (32°C) / 50% RH

[2] ARI conditions: 95°F (35°C) / 80°F (27°C) / 50% RH

