



Convector P-200

Efficient bus heating

MCC convector P-200 offers efficient heating and can be integrated with the Whisper 200 family. The P200 is a twin pipe design made of copper or aluminum that carries glycol

based coolant through the convector. Coil capable of producing up to as much as 714W/m of heat.




Features

- Suitable for heating buses, coaches where highly efficient heating is required
- Designed for vehicles with water/glycol based heating systems
- High output
- Quiet and draft-free heating
- Maintenance free
- Fully compatible with Whisper 200 heaters

Convactor P-200

MCC Convectors

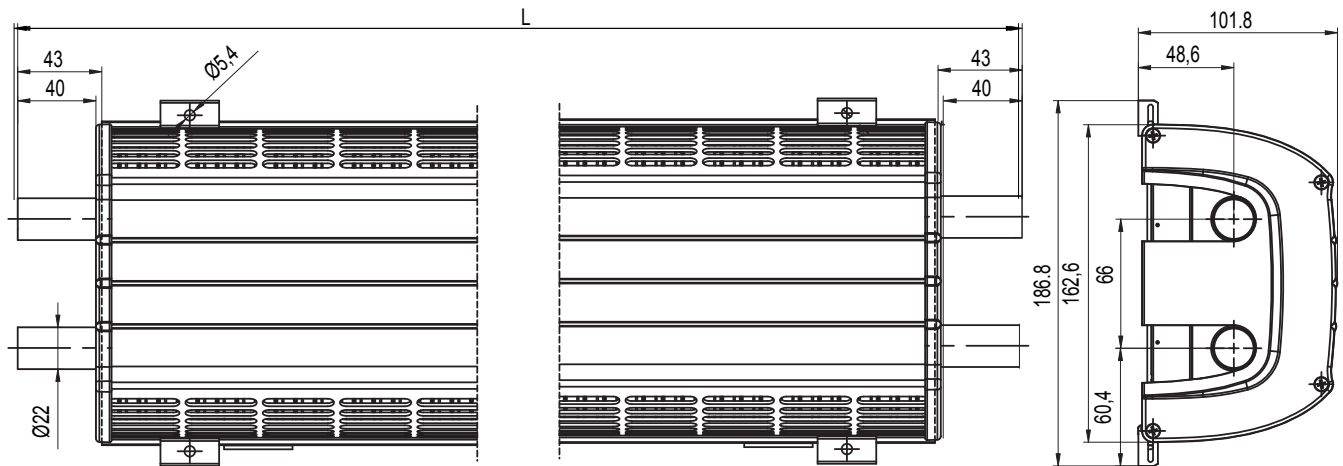

Dimensions in mm

Technical Data

Heat output	2436 Btu/hr (0.71 kW) $Q_{60}^{[1]}$ 4060 Btu/hr (1.2 kW) $Q_{100}^{[1]}$
Piping	Copper or aluminum Ø 0.8" (22 mm)
Weight	Copper 27 lbs/ft (3.71 kg/m), aluminium 24 lbs/ft (3.34 kg/m)
Maximum lengths	197" (5 m)
Color	Silver anodized aluminium
	Please contact your MCC representative for more details

[1] The Q_x value stands for the power in kW emitted from a unit length (1 m) of the convactor at a temperature difference between coolant inlet and room air equal to the subscript (x).

