

## Roof Mount Condenser **CR-430**

# Roof mount Air-conditioning condenser module

The CR-430 roof mounted condenser module has been designed to meet the demanding and varied needs of the Global HVAC market. The CR-430 with its attractive, lightweight, and low profile design provides improved condensing performance, reliability, and ease of installation as compared to its predecessors. The all steel powder coated cabinet construction

provides unparalleled strength and reliability while the attractive TPO cover with integrated stainless steel grills helps keep the weight down without sacrificing functionality or reliability. The system utilizes MCC's signature micro channel heat exchanger (MCHX) coil technology that delivers maximum capacity through improved heat transfer performance.



### Features


- Designed for use with R134a Refrigerant
- Utilizes Micro Channel Condenser Coil (MCHX)
- Powder coated galvanized steel frame
- TPO plastic cover
- Large capacity receiver tank(s) w/sight glass
- Large capacity filter drier(s) (30 cu.in.)
- Single loop version includes single liquid line service valve
- Service-ability/Install friendly
- Multiple unit configurations available
- Available options and upgrades

### Benefits

- Lower cost, less system weight, environmentally friendly
- Improved performance/efficiency, reduced weight, reduced refrigerant charge
- Increased strength and durability
- Durable, lightweight, flexible, UV resistant
- Increases charge holding capacity for system variation, ease of charge with easy to view sight glass
- Improved system reliability, cleaner dryer refrigerant and refrigerant oil
- Allows for low side pump down for ease of service
- Unit was design with install- ability and service ability in mind
- Allow unit to be used in various applications and climates
- Brushless fans, branch guards, etc

# Roof Mount Condenser **CR-430**

MCC Roof Mount Condensers

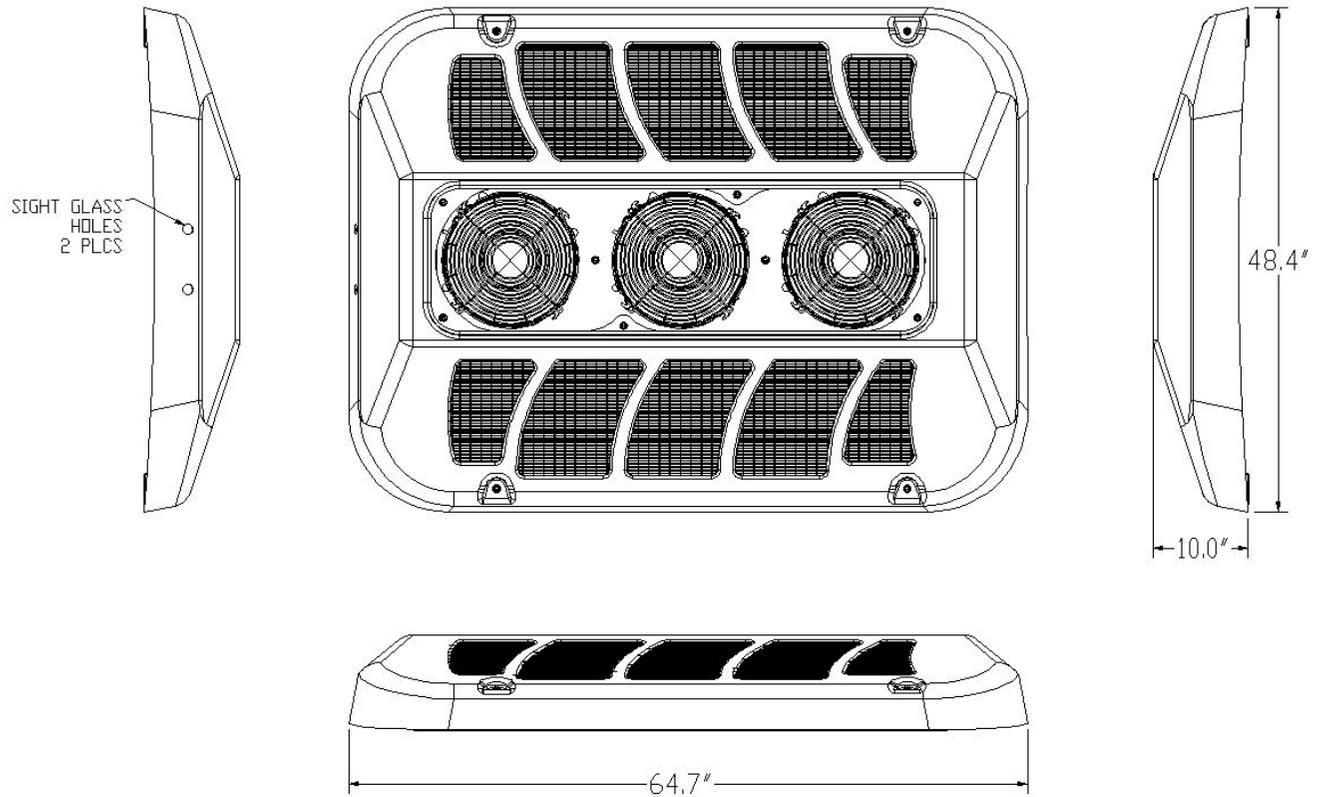

## Technical Data

Condensing capacity	137,000 Btu/hr (37kW) Modeled Max Capacity Condition <sup>[1]</sup>
Air flow	3-Fan: 3500 CFM (5950 m <sup>3</sup> /h) 2-Fan: 2400 CFM (4100 m <sup>3</sup> /h)
Refrigerant	R134a
Current	3-Fan: 47 A at 13.5 Vdc / 31 A at 27.5 Vdc 2-Fan: 31 A at 13.5 Vdc / 21 A at 27.5 Vdc
Weight	160lbs (72.5 kg)
Dimensions (LWH)	64.7" x 10" x 48.4"

[1] Max Capacity: Air in 100°F/50%RH, refrigerant 140°F DST/170°F, refrigerant exit. 0°F Sub-Cool

